

## MANUTENTION AVEC APPAREILLE DE TYPE P-75 "DAYTON"

### P76 Utility Anchor® Setting Plugs

Utility Anchor Setting Plugs a polyurethane plastic in 90° and 45° orientation.


The reusable setting plug properly sets the anchor approximately 1/2" below the surface of the concrete and provides an adequate recess for easy sling attachment. After final positioning of the concrete element, the recess formed by the recess member can be easily grouted or conveniently covered by the Utility Anchor Cover/Patch.

The 90P875 Setting Plug used with the P75H 24,000 lb. anchor requires 2 each P101 holding rods to attach setting plug to the form. No holding plate or magnetic plate are available for this setting plug.

P76 Utility Anchor Setting Plug


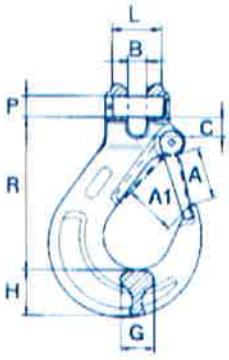
Type	Product Code No.	Length	Width	Depth	Color
90P444	123175	8.00"	3.25"	3"	Blue
45P444	123176	8.00"	3.25"	3"	Blue
90P671	123177	8.00"	3.25"	3"	Orange
90P671	127786	9.00"	4.58"	3.35"	Orange
45P671	123178	8.00"	3.25"	3"	Orange
90P875	124685	15.00"	6.13"	5"	Blue

crochets de levage  
P-75 6UA671 @ 90°  
(4.75"Galv. )  
cap. 3,3 tons

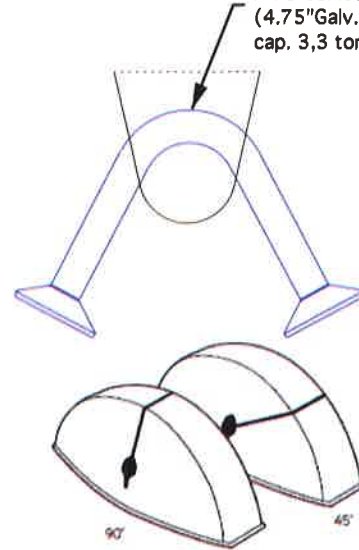

P76 Utility Anchor Setting Plugs

**CBX CROCHET À CHAPE AVEC LINGUET**

Catena	Codice	A	A1	B	C	G	H	R	PxL	Peso	WLL
Chain	Code	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg
Chaîne	Code	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg
Kette	Code	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg
5-6	CBX 06SF	26	19	7.2	8	15	20	69	7.5x17.5	0.25	1400
7	CBX 07SF	34	26	9.6	10	19	28	95	9x22.5	0.55	1900
8	CBX 08SF	34	26	9.5	10	19	28	95	10x22.5	0.50	2500
10	CBX 10SF	40	31	12	13.5	25	33	110	13x29.5	1.00	4000
13	CBX 13SF	51	40	15	17	30	40	132	16x37	1.70	6700
16	CBX 16SF	56	45	18	22	37	48	165	20x52	3.20	10000
20	CBX 20SF	60	53	23	26	61	62	186	24x73	5.00	16000
22	CBX 22SF	70	62	25	29	60	63	210	26x72	12.3	19000

